


Pattern62® Diffusion

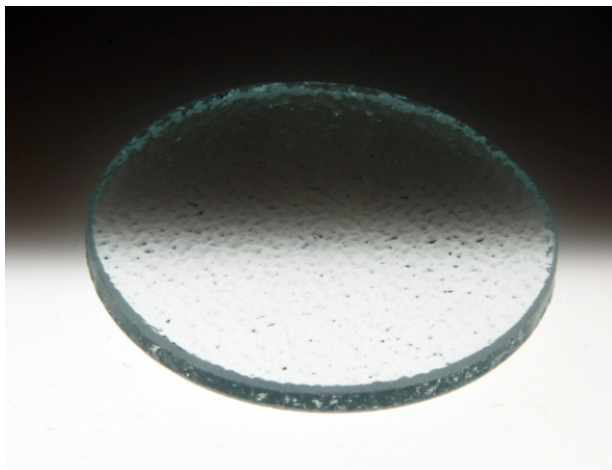

Thickness: 1/8", 5/32", 3/16"

Maximum Size: 60" x 132"

Pattern 62™ can be used to project an obscure or uneven pattern. It is also used in backlit applications to diffuse light.

Features

- Can be fully heat tempered to increase thermal shock resistance and mechanical strength
- Provides even diffusion and maximum transmission
- Can be fabricated to any shape or size under 60" x 132"
- Readily available of the shelf in MR11 1.370" diameter and MR16 1.965" diameter sizes
- Can be coated with a UV Blocking coating or a dichroic color coating

